


## Current Or Voltage Input To Pulse Width Modulated (PWM) Transducer

### Specifications:

Power: /  
Inputs: ;  
Outputs: , 1  
Mount:

ORDERING INFORMATION	
ORDER #	DESCRIPTION
ATP	

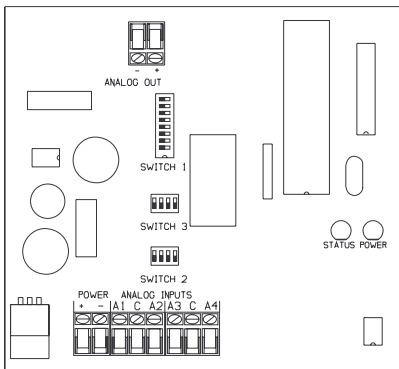


## Signal Selector or Averaging Interface

### Specifications:

Power: /  
Inputs: ;  
Outputs: , 1  
Mount:

ORDERING INFORMATION	
ORDER #	DESCRIPTION
4N1	/ /
4N1-RS485	1 h

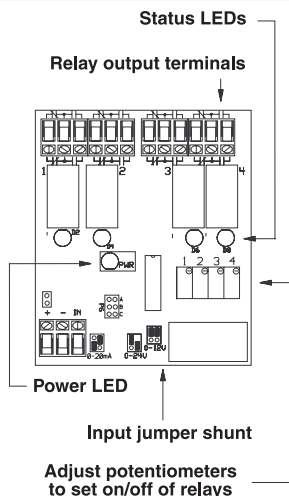


## Volt/Current Input to 4-SPDT Relay Output

Get **Extra** Switching Capacity ...

### Features:

ORDERING INFORMATION	
ORDER #	DESCRIPTION
ATL	

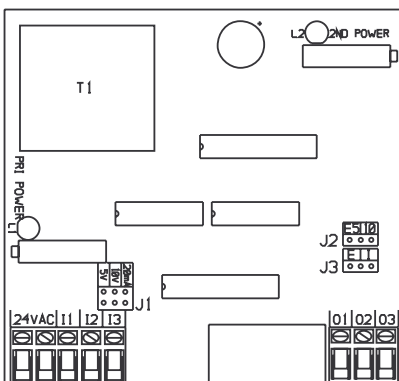

## Volt/Current Transducer with Optical Isolation (1:1 Ratio)

Protect your devices from transient signals  
or grounding problems.

### Specifications:

Input Ranges: 1 ;  
Output Range: 1 ;  
Power: /  
Mount:

ORDERING INFORMATION	
ORDER #	DESCRIPTION
AIM1	/ /