




**Inline Gauge Kit**

Buy this handy kit for adding a 1-1/2", 0-30 psi gauge wherever one is needed. Use it to check in-line pressure for calibration. Use on either plastic or copper tubing.

**Compare!**

Honeywell's Add-A-Gauge Kit (14003519-001) - \$49.30  
Pneuline - \$12.95

ORDERING INFORMATION	
ORDER #	DESCRIPTION
GK030	Pressure Gauge Kit
Includes: 1 1/2", 0-30 Psi Gauge; 1/4" Adapter Tee; 2 Brass, 2 Delrin Ferrules; 2 Brass Inserts	




**Economy Pressure Gauges**

Pneuline Pressure Gauges are easy to read. This assures convenience in the setup and calibration of pneumatic devices. Many other sizes and ranges are available. Use in hot water, chilled water or pneumatic air systems.



ORDERING INFORMATION					
Size	Conn	Mount	0-30#	0-100#	0-160#
1 1/2"	1/8"	Back	PG18B030	—	—
		Bottom	PG18L030	PG18L100	—
2 1/2"	1/4"	Back	PG24B030	PG24B100	PG24B160
		Bottom	PG24L030	PG24L100	PG24L160
PG34L030			PG34L100	PG34L160	
PG44L030		PG44L100	PG44L160		

**NOTE:** These gauges are the steel case budget model. For high quality industrial gauges with a complete assortment of pressure ranges and dial sizes, *call your NECC Sales Rep.*

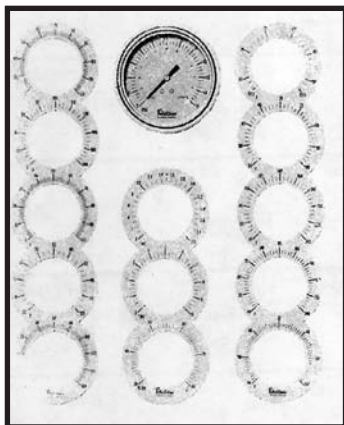

**Receiver Gauge "Roll Your Own" Kit**

This handy uni-kit contains a 3-15 PSIG receiver gauge.

- Pick the range you want from one of the 14 pressure sensitive overlays included in the box.
- This gives you the flexibility of many gauges from one box.

ORDERING INFORMATION		
ORDER #	DIAL	MOUNTING
RG28B	2"	1/8" NPT Back Conn
RG24F	2 1/2"	1/4" BARB-PANEL MTD
RG34F	3 1/2"	1/4" BARB-PANEL MTD

RANGE SCALE OVERLAYS INCLUDED:	
-40° to 160° F	62.5° to 92.5° F
-25° to 125° F	0" to 3" W.C.
0° to 100° F/% R.H.	0" to 10" W.C.
40° to 100° F	30% to 80% R.H.
40° to 140° F	0° to 200° F
40° to 240° F	25° to 125° F
50° to 90° F	3 to 15 psig

**DON'T FORGET!**  
Friends Come And Go,  
But...  
Enemies Accumulate