

# Honeywell

## ST71A PREPURGE TIMER FOR R4795 PRIMARY CONTROL SYSTEM

### APPLICATION

The ST71A is a plug-in timer which provides a 7, 10, 30, 60, or 90 second fixed prepurge timer period at the start of each R4795 cycle.

### INSTALLATION

#### CAUTION

Disconnect power supply before connecting to prevent electrical shock or equipment damage.

1. Make sure timer has the correct timing period.
2. Locate guide slots in metal bracket of R4795. (See Fig. 1.) Fit timer through slots and push downward. Be sure to match connectors to 4 metal prongs.
3. Attach gummed label near timer (see Fig. 1) for future identification.

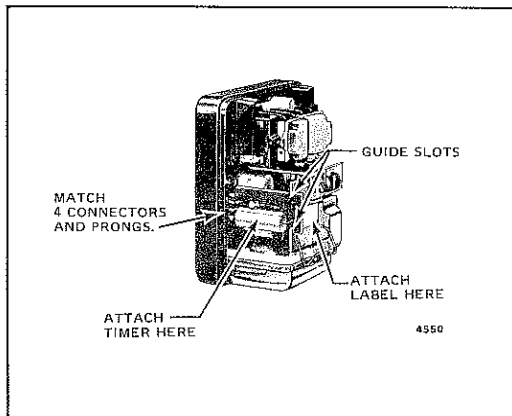


Fig. 1—Location of ST71A Timer and Label for R4795 Primary Control.

HONEYWELL, MINNEAPOLIS, MINN. 55408 INTERNATIONAL Sales Offices in all principal cities of the world. Manufacturing in Australia, Canada, Finland, France, Germany, Japan, Mexico, Netherlands, Spain, Taiwan, United Kingdom, U.S.A.