


FAX 610-789-7300 WWW.NECCDELIVERS.COM **800-227-9800**

For your convenience, we have selected the most popular styles and signals in a handy chart so you don't have to make up the part number yourself. You'll also see there is a column showing the most common signals for the best known manufacturers. We hope you find this a handy resource.

Air Insertion Duct Temperature Sensors

TE702 series duct sensors shown have a polycarbonate enclosure and terminal block. They provide a cost effective solution for air handlers, fan coil units, ducts, plenums or furnaces. Includes a duct mount bracket.




ORDERING INFORMATION		
ORDER #	TYPE	USE WITH
TE-702-A-4-B	1,000 ohm Nickel	Johnson Controls
TE-702-A-12-B	10,000 ohm Type-2	Automated Logic, TAC, Mammoth, Siemens, Solidyne, Trane
TE-702-A-7-B	10,000 ohm Type-3	Carrier, York, Siemens, American Automatrix, Andover, Delta, KMC
TE-702-A-17-B	20,000 ohm Thermister	Honeywell
TE-702-A-5-B	1,000 ohm Balco	Barber-Colman, Trane
TE-702-A-3-B	1,000 ohm Platinum	Andover, Barber-Colman, Honeywell, Johnson, Robertshaw, Siemens

CAUTION: 10K type-2 and 10K type-3 have different temperature to resistance curves. They are NOT interchangeable!

Probe length: 6"; 4, 8 and 12 available

Duct Averaging Temperature Sensors

For control of duct temperature, averaging elements give you the most accurate measurement reporting. The models shown are the most common models. All come with polycarb enclosure and wiring block.

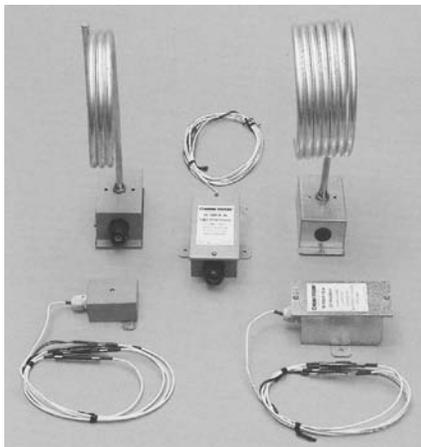

ORDERING INFORMATION		
ORDER #	TYPE	USE WITH
TE-705-A-4-B-2	1,000 ohm Nickel	Johnson Controls
TE-705-A-12-B-2	10,000 ohm Type-2	Automated Logic, TAC, Mammoth, Siemens, Solidyne, Trane
TE-705-A-17-B-2	10,000 ohm Type-3	Carrier, York, Siemens, American Automatrix, Andover, Delta, KMC
TE-705-A-7-B-2	20,000 ohm Thermister	Honeywell
TE-705-A-5-B-2	1,000 ohm Balco	Barber-Colman, Trane
TE-705-A-3-B-2	1,000 ohm Platinum	Andover, Barber-Colman, Honeywell, Johnson, Robertshaw, Siemens

CAUTION: 10K type-2 and 10K type-3 have different temperature to resistance curves. They are NOT interchangeable!

NOTE: Models shown have 12' probes. Other signal types and probe lengths (6 & 24') available built to order. Let us know.